

Prototype for direct flame protection

Direct flame protection

High temperature flame barrier for protection of core components inside the pack.
For applications where thin and flexible flame barrier is required.

Benefits

Flame barrier for internal components protection


Withstands high temperature direct flame

Electrically insulating with high breakdown voltage

0.17mm thick – opportunity to tailor to customer requirement

Thin, flexible, lightweight, and easy to process

Die cut to form

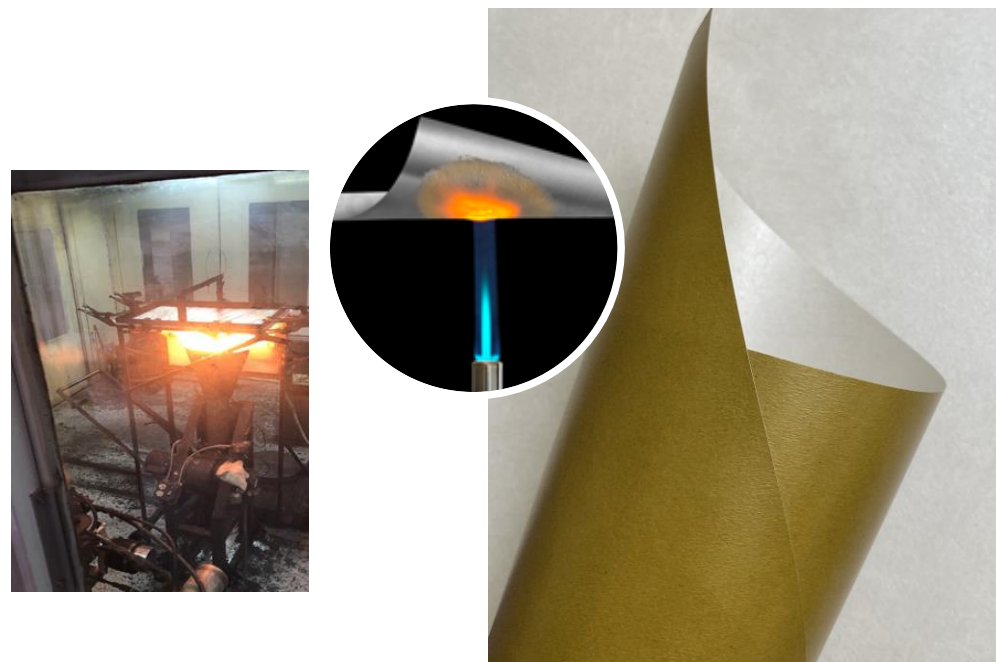

Cannot be used without the express prior written consent of DuPont. This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience become available. This information is intended for use by persons having the technical expertise to undertake evaluation under their own specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first check that the garment selected is suitable for the intended use. The end-user should discontinue use of garment if fabric becomes torn, worn or punctured, to avoid potential chemical exposure. Since conditions of use are beyond our control, DuPont makes no warranties, expressed or implied, including but not limited to warranties of merchantability or fitness for a particular purpose and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or other persons covering any material or its use.

© 2021 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.